



INSTALLATION INSTRUCTIONS



HOOK FRONT WIPER BLADE



1 To remove the current wiper blade, open the cap on the top of the blade, then rotate the blade to 45°.




2 Gently pull the wiper blade down until it disengages from the arm. You may need to press a tab. The blade can then be removed from the arm.



3 Next, remove the new Ezywiper blade from its packaging. Open the tab on the wiper's adaptor.



Place the wiper into the arm and gently slide the blade up until it clicks into place.

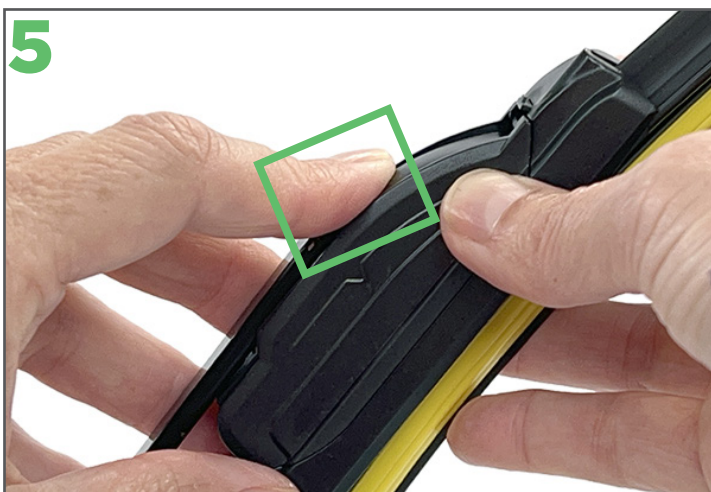

Close the tab on the adaptor and check the blade is securely fitted.



Remove the protective sleeve from the Ezywiper blade before placing the arm back on the windscreen.



Check the low spoiler side of the blade faces the bottom of your windscreen.



For installation videos and more info see ezywiper.co.nz